


# PLF-283

## HIGH ATTENUATION POWER ENTRY MODULE

REV	DATE

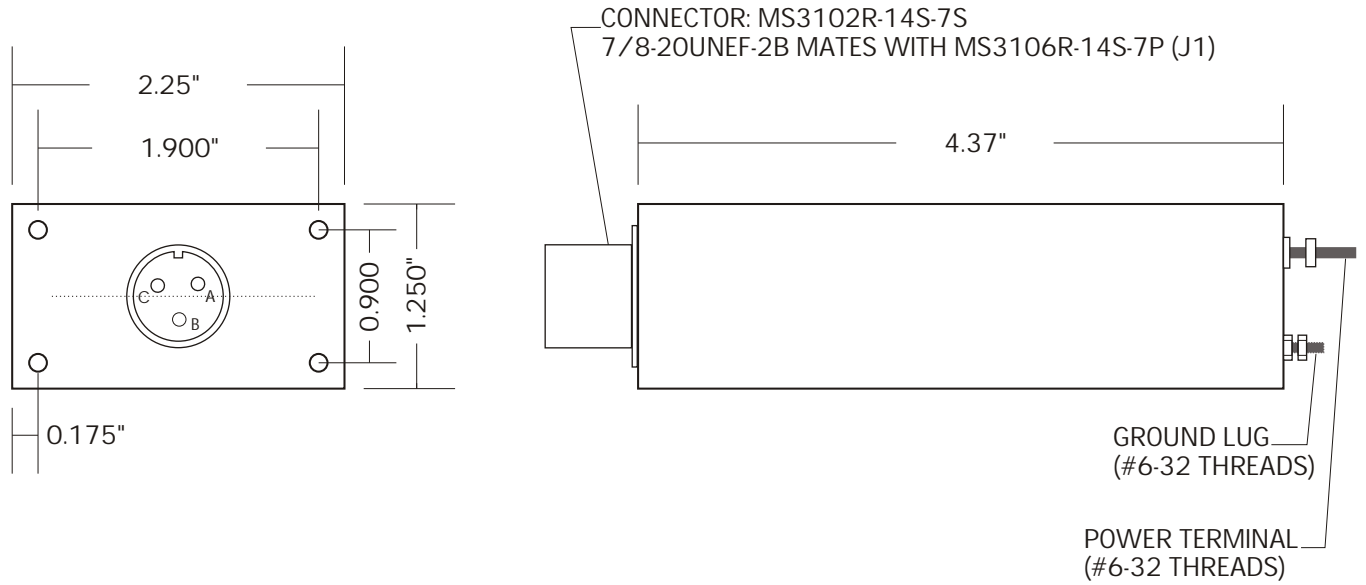


OUTLINE DRAWING

Line Current:	3 Amps
Line Voltage:	110/220 V <sub>AC</sub>
Leakage Current:	3 mA @ 110 V <sub>AC</sub> 2 mA @ 220 V <sub>AC</sub>
Line Frequency:	DC 63Hz
Surge/Transient Protection:	V <sub>C</sub> (V) 650 I <sub>p</sub> (A) 25
Max Surge Current:	2500 A

MINIMUM ATTENUATION		
FREQUENCY	COMMON MODE	SINGLE ENDED
32 KHz	60 dB	60 dB
50 KHz	78 dB	78 dB
100 KHz	87 dB	87 dB
1 Mhz	87 dB	87 dB
10 Mhz	87 dB	87 dB
100 MHz	87 dB	87 dB

SPECIFICATIONS

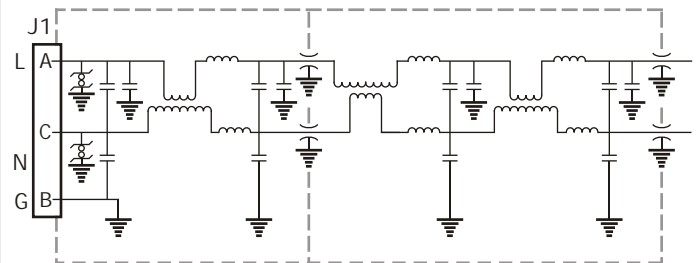

FUNCTIONAL DIAGRAM