


REV	DATE

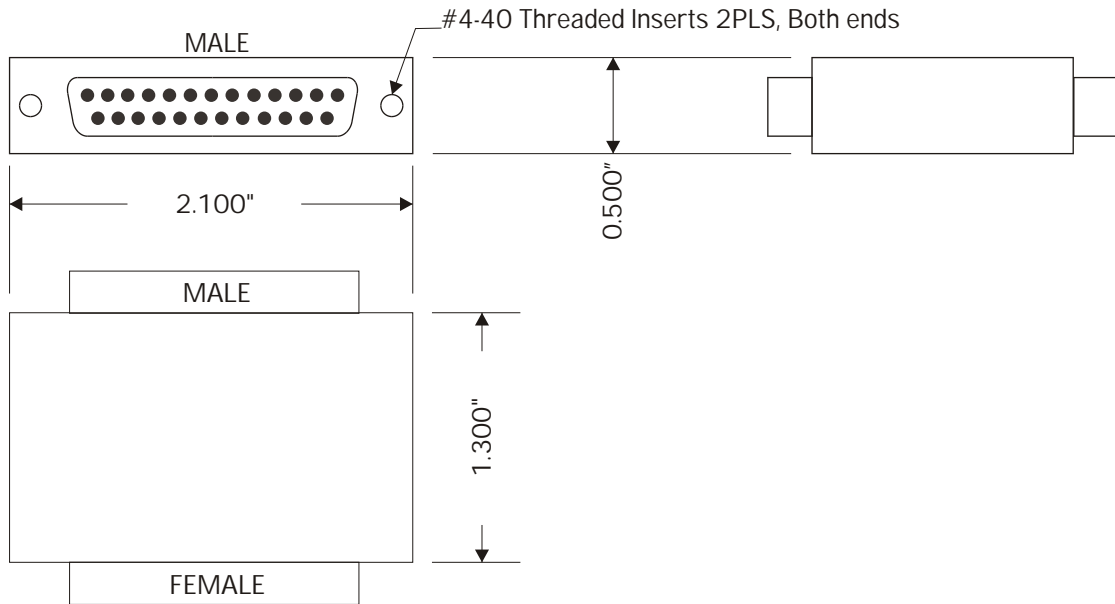

OUTLINE DRAWING


+15 VOLT LINES
 DC CURRENT: 140 mA/LINE
 VOLTAGE: +16 VOLTS TO -1 VOLT

CONTROL LINES
 SOURCE IMPEDANCE: 50 OHMS
 LOAD IMPEDANCE: 35 K OHMS, MIN.
 RISE TIME: 150 μs TYPICAL
 SERIES RESISTANCE: 2 K OHMS

GROUND LINES TIED TO CHASSIS GROUND,
 CAPACITIVELY FILTERED W/3200 pF

Frequency	ATTENUATION	
	Control Lines	+ 15 Volt Lines
10 KHz	10 dB min	10 dB min.
50 KHz	25 dB min	37 dB min.
100 KHz	34 dB min	55 dB min.
200 KHz	42 dB min.	65 dB min.
1 MHz	70 dB min.	65 dB min.
10 MHz	95 dB min.	65 dB min.
1 GHz	95 dB min.	65 dB min.

SPECIFICATIONS

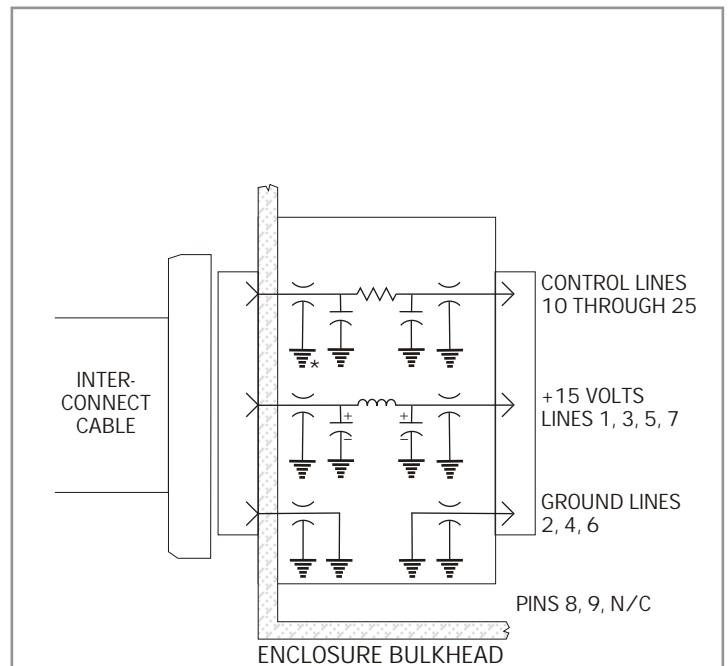

FUNCTIONAL DIAGRAM