


REV	DATE

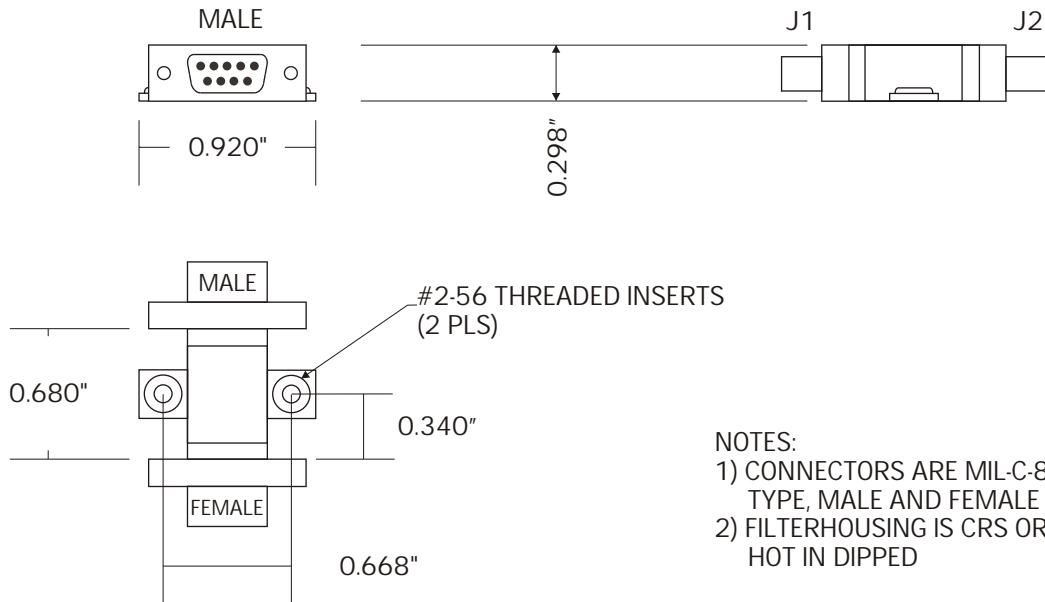

- NOTES:
 1) CONNECTORS ARE MIL-C-83513 TYPE, MALE AND FEMALE
 2) FILTERHOUSING IS CRS OR BRASS HOT IN DIPPED


OUTLINE DRAWING

GMC:
 GUARANTEED
 MINIMUM CAPACITANCE

1600 pF

ATTENUATION		
Frequency	Typical	Minimum
10 MHz	22 dB	18 dB
50 MHz	35 dB	30 dB
100 MHz	41 dB	35 dB
200 MHz	48 dB	42 dB
500 MHz	52 dB	45 dB

SPECIFICATIONS

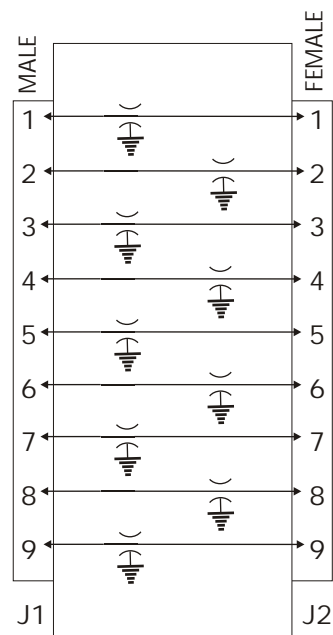

FUNCTIONAL DIAGRAM